

Medical Pharmaceutical Refrigerator

MPR 2100 PRO



TECHNICAL CHARACTERISTICS:

- **Structure** : upright type, realized in sheet steel epoxy coated white colour both in- and outside or in stainless steel 18/10 AISI 304 both in- and outside. All the internal corners are rounded to make easy any cleaning operations and the internal bottom is tray type to contain spills
- **Insulation** : high density (40 Kg/m³) foamed-in-place polyurethane, with a thickness of 75 mm. CFC-free
- **Feet** : Nr 6 made in stainless steel 18/10 AISI 304, adjustable in height for levelling
- **Glass doors** : Nr 3, hinged, side-by-side, made a perimetrical aluminium frame and three layers of tempered insulating glass, with vacuum among the glass layers in order to increase the insulating rate. The doors are provided with a removable magnetic rubber gasket in order to grant a perfect hermetic closing. The handles are realized in aluminium, integrated in the door profile, full-height for an higher comfort of use. The doors are also fitted with a spring loaded automatic closing device for openings inferior then 90° and special door switches that stop the internal ventilation at the door opening (to limit the air cold loss)
- **Internal equipment** : Nr 9 (3 for each door) storage open wire shelves realized in sheet steel with a strong plastic coating (rust-proof

material). The shelves are mounted on special anti-tilt stainless steel slides that allows the shelf extraction and they can be easily removed and adjusted in height without the use of any tool. The special internal racking-system allows a great flexibility of the internal fitting with the possibility of interchange and combine both shelves and drawers (drawers optionally available)

- Shelf dimensions (W x D cm) : 53 x 65
- Shelf loading capability (Kg) : 35 (with uniformly stored material)
- **Internal lighting** : Nr 4 LED tubes, mounted in the side walls and behind the closing columns among the doors,, with activation through a special switch located on the control panel. They grant energy saving and prevent the internal heating produced by the traditional neon tubes
- **Control panel "PRO"** : located in the top part of the structure (above the doors), it is microprocessor operating with soft-touchpads and LCD display, allowing the control of all the functions and working status of the refrigerator (including alarms). The control panel is battery operating in order to grant the functioning of the alarms even in case of power failure. The main functions of the control panel are :
 - Large (2 lines writings) LCD display, retro-illuminated white colour with black characters, indicating the appliance working status (compressor functioning, defrosting, alarm running, actual temperature, etc.)
 - Digital temperature adjusting and displaying with an accuracy of 0,5°C
 - Lighting switch
 - Keyboard password protected with automatic locking, to avoid tampering from unauthorized persons
 - Back-up battery, with automatic recharging, granting till 48 hours autonomy for the control panel functioning in case of power failure
 - Visual and acoustic alarm signalling (with automatic resetting) for:
 - high and low temperature with limits programmable from the user
 - door ajar, delayed of 3 minutes to allow the standard operations
 - power failure
 - battery discharged
 - condenser dirty
 - anti-freezing evaporator
 - sensors failure

Medical Pharmaceutical Refrigerator

MPR 2100 PRO

- Muting facilities for the acoustic alarms, with continuous warning indication on the display and automatic ring-back after 3 minutes if the alarm situation persists
- Test facilities for both battery charging status and alarm limits
- Alarms memory (not deletable) for the last 30 alarm conditions, with the possibility of checking from the display, the alarm condition, when the alarm is started, when it is ended and which is the highest or lowest peak reached from the temperature (if applicable)
- Events memory with the possibility of checking from the display, defrostings, door openings, relays status, etc.
- Pt1000 sensors for a better accuracy of the temperature control
- Internal ventilation setting
- NO/NC contact to remote the alarm signals
- RS 485
- **Cooling unit** : top mounted, with the condensing unit compounded by Nr 1 hermetic compressors and Nr 1 finned condenser, air cooled through a fan. Also, in the ceiling of the storage chamber, is mounted the finned evaporator with copper pipes, that is housed into a stainless steel cover that incorporate the fan. All the mounted components are industrial grade to grant the maximum reliability
- **Refrigerant** : R404a CFC-free
- **Refrigeration** : forced-air, through Nr 2 fans, granting the maximum temperature uniformity and stability inside of the cabinet
- **Defrosting** : completely automatic, thermostat controlled. The condensate water is automatically channelled into an heated tray, located in the cabinet backside, for the automatic evaporation of the condensate water
- **Temperature range** : infinitely adjustable between +2°C / +15°C
- **Voltage (V/ph/Hz)** : 220-230/1/50
- **Plug** : Schuko type
- **Breakers** : Nr 2 glass cartridge fuses with a rating of 10A, at protection of the appliance
- **Noise level (dB(A))** : ≤ 54
- **Gross capacity (litres)** : 2300
- **Net capacity (litres)** : 2100
- **Dimensions (W x D x H cm)** : 225 x 82 x 210
- **Net weight (Kg)** : 370
- **Packed dimensions (W x D x H cm)** : 232 x 98 x 224 (5,10 m³)
- **Gross weight (Kg)** : 410




* The declared performances are referred at +35°C ambient temperature, relative humidity of 70% and without any internal thermal mass (empty cabinet).

* Should it be necessary or useful without undermining any model essential features, technical and stylistic characteristics are subject to be changed without manufacturer's previous notice.

Medical Pharmaceutical Refrigerator

MPR 2100 PRO

ACCESSORIES AVAILABLE



Extra wire shelf



Wire basket



Plastic partitions for drawers




Kit of castors




Temperature chart recorder




Data logger function with USB port



Cable port with cover




Back-up cooling unit




Wooden crate packing



Extra stainless steel wire shelf



Stainless steel drawer



Front top for drawers



Safety door lock with key



Electronic temperature printer



Internal electrical socket



Internal spark-proofing




240V / 60 Hz

Different voltage

Medical Pharmaceutical Refrigerator

MPR 2100 PRO

NEWS 2011! NEWS 2011! NEWS 2011!

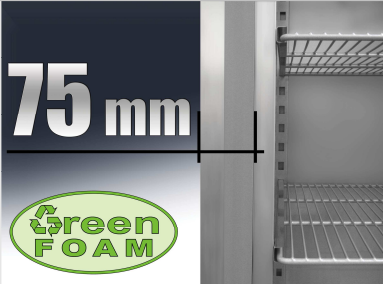

Increased insulation thickness from 60 to 75 mm

- ecological polyurethane foam insulation
- improved temperature holding time to grant an higher safety level for the stored products
- reduction of the energy consumption, through the inferior working time of the cooling unit, till a 30% respect a comparable models with inferior insulation thickness



LED technology for internal lighting

- modern look
- granting a clear view of the stored product
- the LED tubes, working low voltage, grant a energy saving till the 60% respect the equivalent neon tube
- the LED lighting does have any heat emission, contrary to the neon lights, which indirectly, allow a reduction of the cooling unit functioning with the consequent energy savings



New glass door with integrated full-height handle

- higher comfort of opening for all the users
- wide triple-panels glass for a high insulating rate and for a complete view of the stored products
- perimetrical frame with aluminium profile
- replaceable magnetic gasket
- reversibility facilities



New stainless steel evaporator cover

- heavy-duty stainless steel cover
- optimize the airflows
- incorporates fan with increased diameter to grant a better air-circulation and increase the temperature uniformity all over the storage chamber

Medical Pharmaceutical Refrigerator

MPR 2100 PRO




Standard fitted heated tray for the automatic evaporation of the condensate water

- higher comfort of use
- fully automatic functioning



Datalogger-function through USB port (optionally available)

- easy to use
- easy accessibility as the USB port is directly placed in the front panel of the cabinet
- record on a supplied USB flash drive all the most important information of the cabinet such as temperature trends, alarms and door openings
- functioning with whatever PC Windows operating, with Excel installed. The downloaded datas can be checked anytime, without the need of having a dedicated software installed
- no training required for its use as Excel is a commonly available software widely used
- no cost of installation, as the system do not require any network cabling
- maximum freedom in the use, as the cabinet can freely moved without the need to re-create any network
- adjustable recording intervals
- the USB flash drive can contain the recordings till up 5 years operations (with recording intervals every 10 minutes)



Back-up cooling unit (optionally available)

- higher safety level for the stored products
- fully automatic functioning with swapping-over in case of malfunctions to one of the motors
- clear indications about the working status and alarms (written indications, no codes)